

2008

AC Inverter • V/f & Sensorless
Vector

SIEIDrive **ADV50**



Big Performance Small Size.

English

GEFRAN

SIEIDrive ADV50 Series

S
I
E
I
D
r
i
v
e

S
I
E
I
D
r
i
v
e

Power range

AC mains supply	Power range ADV50 kW (Hp)							
	0.4 (0.5)	0.75 (1.0)	1.5 (2.0)	2.2 (3.0)	3.7 (5.0)	5.5 (7.5)	7.5 (10.0)	11.0 (15.0)
230 Vac, 1 phase	Size 1		Size 2					
230 Vac, 3 phase	Size 1			Size 2		Size 3		
460 Vac, 3 phase	Size 1			Size 2		Size 3		

Side-by-side installation


High efficiency cooling and flexible space.



40°C Tamb. max.

ADV50 PC Tool Configurator

ADV50 can be programmed by the use of the PC, integrated functions: programming through parameter list, Integrated oscilloscope, Trend recorder, Saving/Loading and comparing parameters.

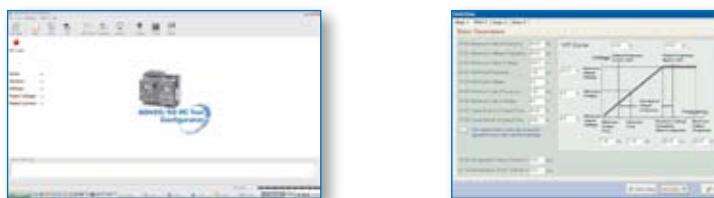

Built-in PLC function

Easy to write Soft PLC ADV50 program without additional PLC.



Variable speed AC Motor Drive

Complete protection function

High precision current detection, full overload protection, over-voltage/over-current stall prevention, short-circuit protection, reset after fault, speed search function and motor overheat protection by PTC.

Modular and Compact design

Modular structure and extension with optional card.
Space saving and easy DIN rail mounting with optional DIN rail adapter.

Removable keypad

The standard keypad acts as status monitor. More functions, including parameter modification, RUN/STOP, speed change and status display, via optional keypad.

Flexible extension

Via optional cards, such as I/O card, Relay card, Encoder card and USB card to meet your application requirement.



Optional fieldbus modules

Provide connection to a variety of networks, including PROFIBUS, DeviceNet, LonWorks and CANopen.



Standard MODBUS protocol

Standard MODBUS Protocol via RS-485 (RJ-45).


RFI-Jumper for IT mains

Removable "Y" capacitor for use on IT mains supplies



Built-in EMC filter

(230V 1-phase and 460V 3-phase) To reduce electromagnetic interference efficiently it




Easy DC BUS sharing

Multiple ADV50 can be connected in parallel to share the regenerative braking energy. In this way, over-voltage is prevented and the DC-bus voltage stabilized.


SIEIDrive ADV50 Series

Basic Wiring Diagram

Figure 1 for ADV50-....-2T/4F series

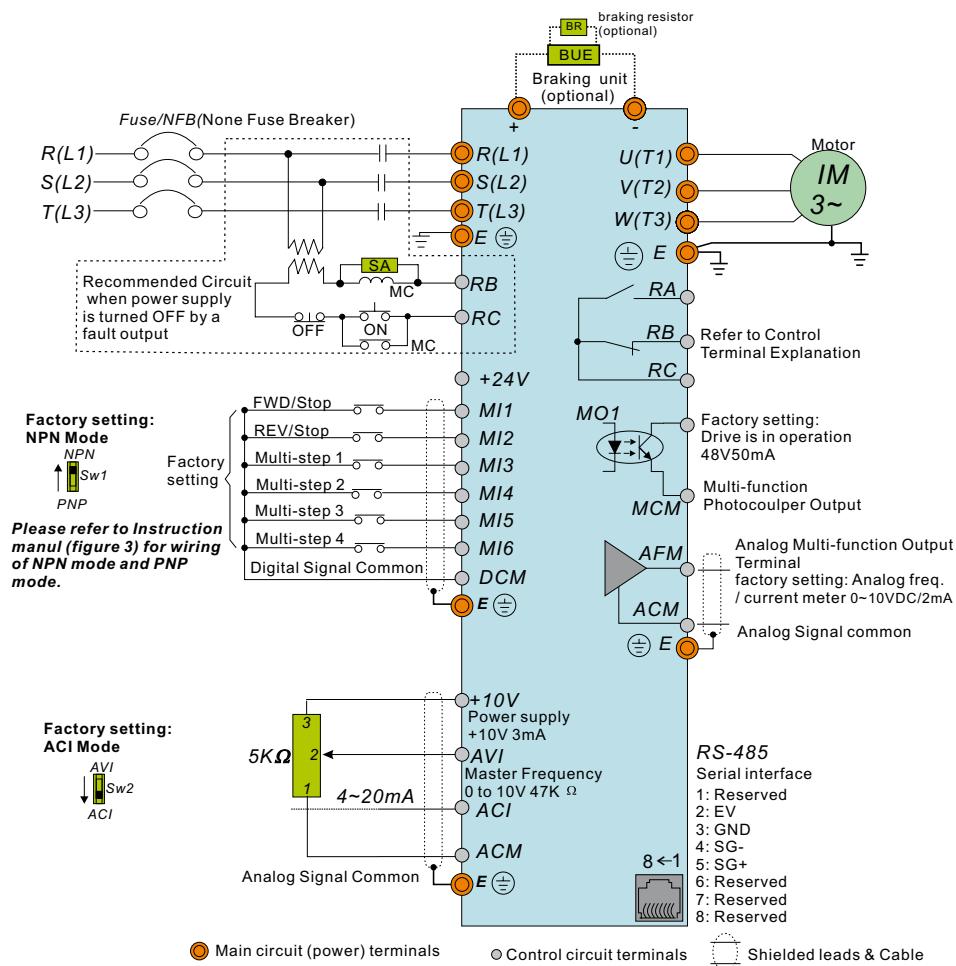

External / Internal parts

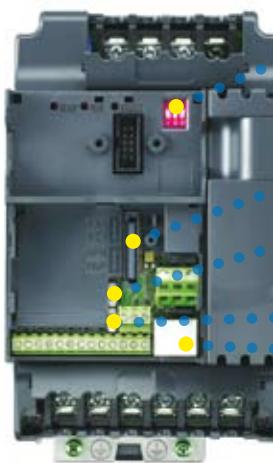

Variable speed AC Motor Drive

Selection Application



Conveyor and Transportation Machinery

- Conveyor belt
- Automatic doors
- Roller door
- Small elevator
- Escalator
- Parking device
- X-Y axis of travelling crane



Food Processing

- Dumpling maker
- Food stirrer
- Noodle maker



Machine Tool/Metal Processing Machinery

- Grinder
- Drill
- Small lathe
- Milling machines
- Injection molding (clamp)



Wood working machinery

- 4 side planer
- Woodcarver
- Wood working machine
- Simple cutting machine for wood working
- Spraying machine



HVAC and Pump Systems

- Buildind air conditioner
- Wastewater processing system
- Costant pressure water treatment system
- Water treatment pump
- Agricultural pump
- Temperature control of middle/large oven
- Air compressor
- Heat exchange fans
- Building water dispenser system
- Dryer's windmill



Paper/Textile Machine

- Round weaver
- Cross weaver
- Ribbon weaver
- Printing press
- Industrial sewing machine
- Knitting machines

Others

- | | | |
|---|---|---|
| <ul style="list-style-type: none">• Ironing machine• Pulverizer• Treadmil | <ul style="list-style-type: none">• Feeder• Industrial washing machine• Car washing machine | <ul style="list-style-type: none">• Packing machine• Centrifuge• Liquid mixer |
|---|---|---|

SIEIDrive ADV50 Series


শুভ কোর্পস

Voltage Class		230V Class			
Model Number ADV50-XXXX		1004	1007	2015	2022
Output Rating	Max. Applicable Motor Output	kW	0.4	0.75	1.5
	Max. Applicable Motor Output	Hp	0.5	1.0	2.0
	Rated Output Capacity	kVA	1.0	1.6	2.9
	Rated Output Current	A	2.5	4.2	7.5
	Maximum Output Voltage	V	3-Phase Proportional to Input Voltage		
	Output Frequency	Hz	0.1~600 Hz		
Input Rating	Carrier Frequency	kHz	1-15		
	Rated Input Current	A	6.5	9.5	15.7
	Rated Voltage/Frequency	V / Hz	Single phase, 200-240V, 50/60Hz		
	Voltage Tolerance		± 10% (180~264 V)		
Frequency Tolerance			± 5% (47~63Hz)		
Cooling Method		Natural Cooling		Fan Cooling	
Weight		kg	1.1	1.1	1.9
					1.9

Voltage Class		230V Class					
Model Number ADV50-XXXX		1007	1015	2022	2037	3055	
Max. Applicable Motor Output	kW	0.75	1.5	2.2	3.7	5.5	
Max. Applicable Motor Output	Hp	1.0	2.0	3.0	5.0	7.5	
Rated Output Capacity	kVA	1.6	2.9	4.2	6.0	9.5	
Rated Output Current	A	4.2	7.5	11.0	17	25	
Maximum Output Voltage	V	3-Phase Proportional to Input Voltage					
Output Frequency	Hz	0.1~600 Hz					
Carrier Frequency	kHz	1~15					
Rated Input Current (1-phase)	A	5.1	9	15	20.6	26	
Rated Voltage/Frequency	V / Hz	3-phase, 200~240 V, 50/60Hz					
Voltage Tolerance		±10%(180~264 V)					
Frequency Tolerance		± 5% (47~63Hz)					
Cooling Method		Natural Cooling	Fan Cooling				
Weight	kg	1.1	1.2	1.9	1.9	3.5	

Voltage Class		460V Class									
Model Number ADV50-XXXX			1004	1007	1015	2022	2037	3055	3075	3110	
Max. Applicable Motor Output	kW	0.4	0.75	1.5	2.2	3.7	5.5	7.5	11		
Max. Applicable Motor Output	Hp	0.5	1.0	2.0	3.0	5.0	7.5	10	15		
Rated Output Capacity	kVA	1.2	2.0	3.3	4.4	6.8	9.9	13.7	18.3		
Rated Output Current	A	1.5	2.5	4.2	5.5	8.2	13	18	24		
Maximum Output Voltage	V	3-Phase Proportional to Input Voltage									
Output Frequency	Hz	0.1~600 Hz									
Carrier Frequency	kHz	1-15									
Input Rating	Rated Input Current	A	1.8	3.2	4.3	7.1	11.2	14	19	26	
	Rated Voltage/Frequency	V / Hz	3-phase, 380~480V, 50/60Hz								
	Voltage Tolerance		±10% (342~528V)								
	Frequency Tolerance		± 5% (47~63Hz)								
	Cooling Method		Natural Cooling			Fan Cooling					
	Weight	kg	1.2	1.2	1.2	1.9	1.9	4.2	4.2	4.2	

Dimensions - mm [inches]

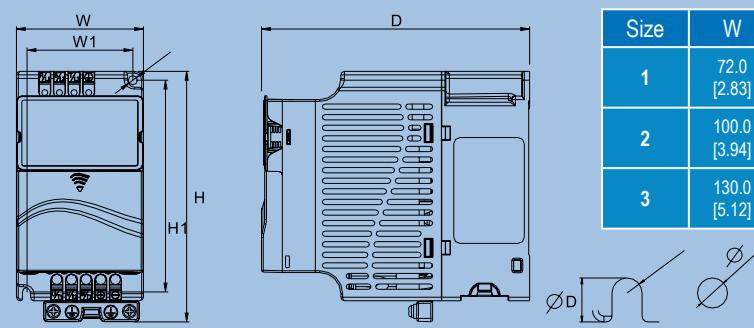

Size	W	W1	H	H1	D	\emptyset	$\emptyset D$
1	72.0 [2.83]	60.0 [2.36]	142.0 [5.59]	120.0 [4.72]	152.0 [5.98]	5.2 [0.04]	7.6 [0.06]
2	100.0 [3.94]	89.0 [3.50]	174.0 [6.86]	162.0 [6.38]	152.0 [5.98]	5.5 [0.22]	9.3 [0.36]
3	130.0 [5.12]	116.0 [4.57]	260.0 [10.24]	246.0 [9.70]	169.2 [6.66]	5.5 [0.22]	9.8 [0.38]

Variable speed AC Motor Drive

General Specifications		
Control Characteristics	Control System	V/f or sensorless control with SPWM modulation (Sinusoidal Pulse Width Modulation)
	Frequency Setting Resolution	0.01Hz
	Output Frequency Resolution	0.01Hz
	Torque Characteristics	Including the auto-torque/auto-slip compensation; starting torque can be 150% at 3.0Hz
	Overload Endurance	150% of rated current for 1 minute
	Skip Frequency	Three zones, setting range 0.1-600Hz
	Accel/Decel Time	0.1 to 600 seconds (2 Independent settings for Accel/Decel time)
	Stall Prevention Level	Setting 20 to 250% of rated current
	DC Braking	Operation frequency 0.1-600.0Hz, output 0-100% rated current Start time 0-60 seconds, stop time 0-60 seconds
	Regenerated Braking Torque	Approx. 20% (up to 125% possible with optional brake resistor or externally mounted brake unit)
Operating Characteristics	V/f Pattern	Adjustable V/f pattern
	Frequency Setting	Keypad Setting by ▲ ▼ External Signal Potentiometer-5kΩ/0.5W, 0 to +10VDC, 4 to 20mA, RS-485 interface; Multi-function Inputs 3 to 9 (15 steps, Jog, up/down)
	Operation Setting Signal	Keypad Set by RUN and STOP External Signal 2 wires/3 wires (MI1, MI2, MI3), JOG operation, RS-485 serial interface (MODBUS), programmable logic controller
	Multi-function Input Signal	Multispeed selection 0 to 15, Jog, accel/decel inhibit, 2 accel/decel switches, counter, external Base Block, ACI/AVI selections, driver reset, UP/DOWN key settings, NPN/PNP input selection
	Multi-function Output Indication	AC drive operating, frequency attained, non-zero frequency, Base Block, fault indication, local/remote indication, drive is ready, overheat alarm, emergency stop and status selections of input terminals (NC/NO)
	Analog Output Signal	Output frequency/current
	Alarm Output Contact	Contact will be On when drive malfunctions (1 Form C/change-over contact and 1 open collector output for standard type)
	Operation Functions	Built-in PLC, AVR, accel/decel S-Curve, over-voltage/over-current stall prevention, 5 fault records, reverse inhibition, momentary power loss restart, DC braking, auto torque/slip compensation, auto tuning, adjustable carrier frequency, output frequency limits, parameter lock/reset, vector control, PID control, external counter, MODBUS communication, abnormal reset, abnormal re-start, power-saving, fan control, sleep/wake frequency, 1st/2nd frequency source selections, 1st/2nd frequency source combination, NPN/PNP selection. Parameters for motor 0 to motor 3, DEB and OOB (Out Of Balance Detection), for washing machine (fw 1.11)
	Protection Functions	Over voltage, over current, under voltage, external fault, overload, ground fault, overheating, electronic thermal, IGBT short circuit, PTC
	Display Keypad (optional)	6-key, 7-segment LED with 4-digit, 5 status LEDs, master frequency, output frequency, output current, custom units, parameter values for setup and lock, faults, RUN, STOP, RESET, FWD/REV
Environmental Conditions	Built-in EMC Filter	EN61800-3:2004 : 2 nd Environment, Category 3, carrier frequency ≤8kHz, motor cable lengths ≤15m
	Enclosure Rating	IP20
	Pollution Degree	2
	Installation Location	Altitude 1,000 m or lower, keep from corrosive gasses, liquid and dust
	Ambient Temperature	-10°C to 50°C (40°C for side-by-side mounting), non-condensing and not frozen
	Storage/ Transportation Temperature	-20 °C to 60 °C
	Ambient Humidity	Below 90% RH (non-condensing)
	Vibration	9.80665m/s ² (1G) less than 20Hz, 5.88m/s ² (0.6G) at 20 to 50Hz
Approvals		  

SIEIDrive ADV50 Series

Accessories

Codes

SIEIDrive - ADV50
AC Inverter • V/f & Sensorless Vector

00

Model explanation

ADV50 1007 - XXX - 2T	
Drive ADV50 series	EMI Filter: F = included = not incl.
Mechanical drive sizes: 1 = size 1 (frame A) 2 = size 2 (frame B) 3 = size 3 (frame C)	Rated voltage: 2M=230Vac, 1ph 2T=230Vac, 3ph 4=400-460Vac, 3ph
Drive powers, in kW: 004 = 0.4 kW 007 = 0.75 kW 015 = 1.5 kW 022 = 2.2 kW 037 = 3.7 kW 055 = 5.5 kW 075 = 7.5 kW 110 = 11.0 kW	Software : X = standard
	Braking unit : X = not included B = included
	Keypad: X = not included K = included




Drive models & codes

Models	Code	Description
230V Class - Single phase		
ADV50-1004-XXX-2MF	S6D20	Size 1 - 0.4 kW - No keypad - EMC Filter included
ADV50-1007-XXX-2MF	S6D21	Size 1 - 0.75 kW - No keypad - EMC Filter included
ADV50-2015-XBX-2MF	S6D22	Size 2 - 1.5 kW - No keypad - EMC Filter included
ADV50-2022-XBX-2MF	S6D23	Size 2 - 2.2 kW - No keypad - EMC Filter included
230V Class - Three phase		
ADV50-1007-XXX-2T	S6D25	Size 1 - 0.75 kW - No keypad
ADV50-1015-XXX-2T	S6D26	Size 1 - 1.5 kW - No keypad
ADV50-2022-XBX-2T	S6D27	Size 2 - 2.2 kW - No keypad
ADV50-2037-XBX-2T	S6D28	Size 2 - 3.7 kW - No keypad
ADV50-3055-XBX-2T	S6D29	Size 3 - 5.5 kW - No keypad
ADV50-3075-XBX-2T	S6D30	Size 3 - 7.5 kW - No keypad
400-460V Class - Three phase		
ADV50-1004-XXX-4F	S6D31	Size 1 - 0.4 kW - No keypad - EMC Filter included
ADV50-1007-XXX-4F	S6D32	Size 1 - 0.75 kW - No keypad - EMC Filter included
ADV50-1015-XXX-4F	S6D33	Size 1 - 1.5 kW - No keypad - EMC Filter included
ADV50-2022-XBX-4F	S6D34	Size 2 - 2.2 kW - No keypad - EMC Filter included
ADV50-2037-XBX-4F	S6D35	Size 2 - 3.7 kW - No keypad - EMC Filter included
ADV50-3055-XBX-4F	S6D36	Size 3 - 5.5 kW - No keypad - EMC Filter included
ADV50-3075-XBX-4F	S6D37	Size 3 - 7.5 kW - No keypad - EMC Filter included
ADV50-3110-XBX-4F	S6D38	Size 3 - 11 kW - No keypad - EMC Filter included

Variable speed AC Motor Drive

Accessories & Options

Models	Code	Description
	KB-ADV50	S6D56 Display keypad (6-key, 7-segment LED with 4-digit)
	EXP-D6-ADV50	S6D59 Digital I/O Expansion card: 3 Digital PNP/NPN inputs, 3 digital NPN outputs
	USB-485-ADV20/50	S6D65 USB-RS485 RJ45 Converter
	EXP-DN-ADV20/50	S6D50 DeviceNet module
	EXP-PDP-ADV20/50	S6D52 Profibus module
	EXP-CAN-ADV20/50	S6D53 CANopen module

Models	Code	Description
	KIT DIN ADV20-SA	S6D57 DIN-rail adapter for ADV50 size 1
	KIT DIN ADV20-SB	S6D58 DIN-rail adapter for ADV50 size 2
	KIT EMC ADV20/50	S6D54 Earthing plate
	BU-2-ADV20/50	S6D70 Braking Unit 1.5kW 230V series
	BU-4-ADV20/50	S6D71 Braking Unit 1.5kW 400V series
	Cable 2mt ADV50	S6D82 Standard keypad extension cable 2 mt

Others options (on request only)

Models	Code	Description
EXP-A4-ADV50	S6D62	I/O Expansion card (2 AI / 2 AO)
EXP-R2-ADV50	S6D60	2 Relays expansion card
EXP-R3-ADV50	S6D61	3 Relays expansion card
EXP-ENC-ADV50	S6D63	Encoder Expansion card (5-24V)
EXP-USB-ADV50	S6D64	USB 1.1 Expansion card
EXP-LWK-ADV20/50	S6D51	LonWorks module
BU-2A-ADV20/50	S6D72	Braking Unit 3.7kW 230V series
BU-4A-ADV20/50	S6D73	Braking Unit 3.7kW 400V series

Models	Code	Description
RF-OUT-ADV20/50	S6D67	Zero Phase Reactor
Memory KB-ADV20/50	S6D66	Digital Keypad for parameters copy

SIEIDrive ADV50 Series

Braking Resistors

The table shows the combinations of braking resistors that can be used with internal braking units and with any external braking units (if not integrated). Values for standard resistors refer to a typical braking cycle of 10%.

Models	Brake Unit Model (No. Units)	Brake Resistors Model Code (No. Units)		Brake Res. Dimensions Width x Height x Depth (Weight)
230V Class				
ADV50-1004-XXX-2MF	BU-2-ADV20/50 (1)	RF220T 250R	S8T0CP (1)	300 x 27 x 36 mm (500 g)
ADV50-1007-XXX-2MF/2T	BU-2-ADV20/50 (1)	RF220T 150R	S8T0CQ (1)	300 x 27 x 36 mm (500 g)
ADV50-2015-XBX-2MF	<i>Internal Braking Unit</i>	RF300DT100R	S8T0CB (1)	260 x 47 x 106 mm (1400 g)
ADV50-1015-XXX-2T	BU-2-ADV20/50 (1)	RF300DT100R	S8T0CB (1)	260 x 47 x 106 mm (1400 g)
ADV50-2022-XBX-2MF/2T	<i>Internal Braking Unit</i>	RF300DT 68R	S8T0CS (1)	260 x 47 x 106 mm (1400 g)
ADV50-3037-XBX-2T	<i>Internal Braking Unit</i>	RFPD750DT 45R	S8T0CV (1)	200 x 70 x 106 mm (1700 g)
ADV50-3055-XBX-2T	<i>Internal Braking Unit</i>	RFPD750DT 38R	S8T0CU (1)	200 x 70 x 106 mm (1700 g)
ADV50-3075-XBX-2T	<i>Internal Braking Unit</i>	RFPD750DT 26R	S8T0CZ (1)	200 x 70 x 106 mm (1700 g)
460V Class				
ADV50-1004-XXX-4F	BU-4-ADV20/50 (1)	RF300DT400R	S8T0CR (1)	260 x 47 x 106 mm (1400 g)
ADV50-1007-XXX-4F	BU-4-ADV20/50 (1)	RF300DT400R	S8T0CR (1)	260 x 47 x 106 mm (1400 g)
ADV50-1015-XXX-4F	BU-4-ADV20/50 (1)	RF300DT 200R	S8T1DB (1)	300 x 27 x 36 mm (500 g)
ADV50-2022-XBX-4F	<i>Internal Braking Unit</i>	RF300DT 150R	S8T0CT (1)	260 x 47 x 106 mm (1400 g)
ADV50-2037-XBX-4F	<i>Internal Braking Unit</i>	RFPD750DT 100R	S8SY4 (1)	200 x 70 x 106 mm (1700 g)
ADV50-3055-XBX-4F	<i>Internal Braking Unit</i>	RFPD750DT 100R	S8SY4 (1)	200 x 70 x 106 mm (1700 g)
ADV50-3075-XBX-4F	<i>Internal Braking Unit</i>	RFPD750DT 80R	S8T0CD (1)	200 x 70 x 106 mm (1700 g)
ADV50-3110-XBX-4F	<i>Internal Braking Unit</i>	RFPD1100DT 55R	S8T1DA (1)	320 x 70 x 106 mm (2700 g)

Fuses

Following table shows the suggested fuses matching. Those fuses are not available in Gefran.

Models	Europe	America
	Fuse current (A) - Suggested type	Bussmann P/N (UL 508C)
230V Class		
ADV50-1007-XXX-2T	8 A , gR type	JJN-10
ADV50-1004-XXX-2MF	10 A , gR type	JJN-15
ADV50-1015-XXX-2T	16 A , gR type	JJN-20
ADV50-1007-XXX-2MF	16 A , gR type	JJN-20
ADV50-2022-XBX-2T	25 A , gR type	JJN-30
ADV50-2015-XBX-2MF	32 A , gR type	JJN-40
ADV50-2037-XBX-2T	32 A , gR type	JJN-40
ADV50-2022-XBX-2MF	40 A , gR type	JJN-50
ADV50-3055-XBX-2T	40 A , gR type	JJN-50
ADV50-3075-XBX-2T	50 A , gR type	JJN-60
460V Class		
ADV50-1004-XXX-4F	6 A , gR type	JJS-6
ADV50-1007-XXX-4F	6 A , gR type	JJS-6
ADV50-1015-XXX-4F	8 A , gR type	JJS-10
ADV50-2022-XBX-4F	12 A , gR type	JJS-15
ADV50-2037-XBX-4F	20 A , gR type	JJS-20
ADV50-3055-XBX-4F	25 A , gR type	JJS-30
ADV50-3075-XBX-4F	32 A , gR type	JJS-40
ADV50-3110-XBX-4F	40 A , gR type	JJS-50

Drive & Motion Control Unit

GEFRAN Product Overview

Inverters



ADV20

- V/f
- 0.4... 3.7 kW
- 110...120 Vac, 1ph
- 200...240 Vac, 1ph
- 380...480 Vac, 3ph

ADV50

- V/f & Sensorless Vector
- 0.4... 11 kW
- 200...240 Vac, 1ph
- 200...240 Vac, 3ph
- 380...480 Vac, 3ph

ADV200

- Vector Field Oriented
- 0.75... 45 kW
- 400 ... 480 Vac, 3ph

AGy-EV

- Torque Vector
- 0.75 ... 200 kW
- 230 ... 575 Vac, 3ph

AVy

- Flux Vector
- 0.75 ... 630 kW
- 230 ... 690 Vac, 3ph

Inverters LIFT



AVMs

- Roomless applications
- Speed range up to 3m/s
- Geared and gearless
- From 5.5kW (7.5Hp) to 18.5kW (25Hp)

AVRy

- Built-in power recovery
- Speed range up to 5m/s and beyond
- Gearless
- From 5.5 (7.5Hp) to 15kW (20Hp)

Lift Drive System

- System complete with:
- AVyL or AGyL drive
 - Internal EMC filter
 - Internal DC choke
 - Internal Output contactors
 - Emergency supply battery

AGy LIFT

- Sensorless Vector
- Speed range up to 1.5m/s with closed loop
- New installation and Retrofitting
- 0.75 ... 160 kW

AVy LIFT

- Flux Vector
- Speed range up to 5m/s and beyond
- New installation and Retrofitting
- 0.75 ... 160 kW

Brushless



XVy-EV Servodrive

- Brushless and Asynchronous
- 1.5 ... 315 kW (2 ... 450 Hp)
- 230 ... 480 Vac, 3ph

SHJ Servomotors

- 230Vac and 400Vac
- 3000, 4000, 4500, 6000, 8000 rpm
- from 0.33 to 3.8Nm

SBM Servomotors

- 400Vac
- 1500, 2000, 3000 and 4000 rpm
- from 2 to 442Nm

Digital DC



Download brochures or see more details at

www.gefran.com

TPD32

- 20 A ... 4800 A (2 and 4 quadrants)
- 230 ... 690 Vac, 3ph

GEFRAN



GEFRAN BENELUX

Lammerdries, 14A
B-2250 OLEN
Ph. +32 (0) 14248181
Fax. +32 (0) 14248180
info@gefran.be

GEFRAN BRASIL ELETROELETRÔNICA

Avenida Dr. Altino Arantes,
377/379 Vila Clementino
04042-032 SÃO PAULO - SP
Ph. +55 (0) 1155851133
Fax +55 (0) 1155851425
geftran@gefran.com.br

GEFRAN DEUTSCHLAND

Philipp-Reis-Straße 9a
63500 SELIGENSTADT
Ph. +49 (0) 61828090
Fax +49 (0) 6182809222
vertrieb@gefran.de

GEFRAN SUISSE SA

Rue Fritz Courvoisier 40
2302 La Chaux-de-Fonds
Ph. +41 (0) 329684955
Fax +41 (0) 329683574
office@gefran.ch

GEFRAN - FRANCE

4, rue Jean Desparmet - BP 8237
69355 LYON Cedex 08
Ph. +33 (0) 478770300
Fax +33 (0) 478770320
commercial@gefran.fr

GEFRAN INC

Automation and Sensors
8 Lowell Avenue
WINCHESTER - MA 01890
Toll Free 1-888-888-4474
Ph. +1 (781) 7295249
Fax +1 (781) 7291468
info@gefranisi.com

GEFRAN INC

Motion Control
14201 D South Lakes Drive
NC 28273 - Charlotte
Ph. +1 704 3290200
Fax +1 704 3290217
salescontact@sieiamerica.com

SIEI AREG - GERMANY

Zachersweg, 17
D 74376 - Gemmingheim
Ph. +49 7143 9780
Fax +49 7143 97397
info@sieiareg.de

GEFRAN SIEI - UK Ltd.

7 Pearson Road, Central Park
TELFORD, TF2 9TX
Ph. +44 (0) 845 2604555
Fax +44 (0) 845 2604556
sales@gefran.co.uk

GEFRAN SIEI - ASIA

Blk. 30 Loyang way
03-19 Loyang Industrial Estate
508769 SINGAPORE
Ph. +65 6 8418800
Fax. +65 6 7428300
info@gefransiei.com.sg

GEFRAN SIEI Electric

Block B, Gr.Fr. No.155, Fu Te Xi Yi Road,
Wai Gao Qiao Trade Zone
200131 Shanghai
Ph. +86 21 5866 7816
Ph. +86 21 5866 1555
gefransh@online.sh.cn

GEFRAN SIEI DRIVES TECHNOLOGY

No.1265, B1, Hong De Road,
Jia Ding District
201821 Shanghai
Ph. +86 21 69169898
Fax +86 21 69169333
info@gefransiei.com.cn

AUTHORIZED DISTRIBUTORS

Argentina	Saudi Arabia
Austria	Singapore
Australia	Slovakia Republic
Brasil	Slovenia
Bulgaria	South Africa
Canada	Spain
Chile	Sweden
Cyprus	Taiwan
Colombia	Thailand
Czech Republic	Tunisia
Denmark	Turkey
Egypt	Ukraine
Finland	United Arab Emirates
Greece	Venezuela
Hong Kong	
Hungary	
India	
Iran	
Israel	
Japan	
Jordan	
Korea	
Lebanon	
Malaysia	
Maroc	
Mexico	
New Zealand	
Norway	
Peru	
Poland	
Portugal	
Rumania	
Russia	

GEFRAN

GEFRAN S.p.A.

Via Sebina 74
25050 Provaglio d'Iseo (BS) ITALY
Ph. +39 030 98881
Fax +39 030 9839063
info@gefran.com
www.gefran.com

Drive & Motion Control Unit

Via Carducci 24
21040 Gerenzano [VA] ITALY
Ph. +39 02 967601
Fax +39 02 9682653
infomotion@gefran.com

Technical Assistance :

technohelp@gefran.com

Customer Service :

motioncustomer@gefran.com
Ph. +39 02 96760500
Fax +39 02 96760278



Certificate No. FM 38167

Rev. 0.2 - 19-9-2008

